


20.0515S / 20.0515D



材质: ADC12 铝合金灯体、压盖;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.5 米两 / 三芯电源线, 线径 7.0mm;
DMX512 控制: 1 条 0.5 米六芯信号线, 线径 7.5mm
20.0515S


包装: 包装: 灯具净重: 1.2kg
外箱尺寸: 450x305x345mm (12 灯 / 箱)
20.0515D
灯具净重: 1.8kg
外箱尺寸: 420x300x470mm (12 灯 / 箱)

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 1x0.5m length 3-cores Ø7.0mm power supply cable;
DMX512 compatible: 1x0.5m length 6-cores Ø7.5mm data cables.
Nickel plated brass waterproof cable gland
20.0515S

Packaging: Net weight: 1.2kg
Outer carton: 450x305x345mm (12pcs/ctn)
20.0515D
Net weight: 1.8kg
Outer carton: 420x300x470mm (12pc/ctn)

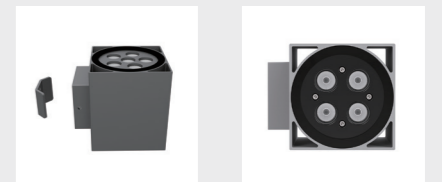




20.0515S

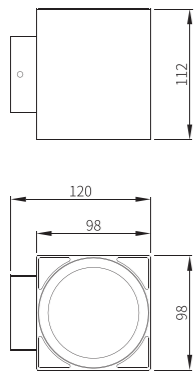

LED 10W 4000k Beam Angle	Beam Diagram	Beam Angle	H(m)	medlux	maxlux
10°		10°	2.0	1527.2	2151.6
15°		15°	2.0	960.6	1403.5
25°		25°	2.0	909.1	1302.2
40°		40°	2.0	232.6	341.5
60°		60°	2.0	102.3	165



20.0515D

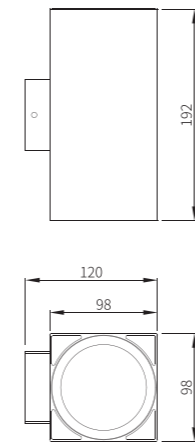

LED 10W 4000k Beam Angle	Beam Diagram	Beam Angle	H(m)	medlux	maxlux
10°		10°	2.0	1874.7	2753.7
15°		15°	2.0	493.3	735.5
25°		25°	2.0	206.3	278
40°		40°	2.0	80.7	107.6
60°		60°	2.0	80.7	107.6

Model No.	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficiency	Control Mode	Beam Angle
20.0515S.A4V24	2200K-5700K	Ra>80	960lm	8W	720lm	90lm/W	ON/OFF	10°/15°/25°/40°/60°
20.0515S.A4V220	2200K-5700K	Ra>80	1350lm	10W	880lm	88lm/W	ON/OFF	10°/15°/25°/40°/60°
20.0515S.A4CV24	2200K-5700K	Ra>80	960lm	8W	720lm	90lm/W	DMX512	10°/15°/25°/40°/60°
20.0515D.A8V24	2200K-5700K	Ra>80	2240lm	16W	1440lm	90lm/W	ON/OFF	10°/15°/25°/40°/60°
20.0515D.A8CV24	2200K-5700K	Ra>80	2240lm	16W	1408lm	88lm/W	DMX512	10°/15°/25°/40°/60°
20.0515D.A8V220	2200K-5700K	Ra>80	2700lm	20W	1800lm	90lm/W	ON/OFF	10°/15°/25°/40°/60°

Installation:

