

WEBB  
DECO

**WEBB DECO**

GENERAL CATALOGUE PROGRAM  
2019-2020

---

# LED 庭院灯

Bollards / Landscape

Luminaires



50.7001  
P\_281



50.7003  
P\_285



50.7006  
P\_289



50.7007  
P\_293



50.7008  
P\_297



50.7009  
P\_301



50.7010  
P\_305



50.7011  
P\_309



50.7012  
P\_313



50.7014  
P\_317



50.2013  
P\_321



50.T076  
P\_325

---

# LED 吸顶灯

Ceiling Luminaires




60.8503  
P\_333



60.8504  
P\_337




60.0506  
P\_341



60.0507  
P\_343



60.0508  
P\_345



60.0509  
P\_347




60.0515  
P\_349





北京·亚洲基础设施投资银行  
Asian Infrastructure Investment Bank · Beijing



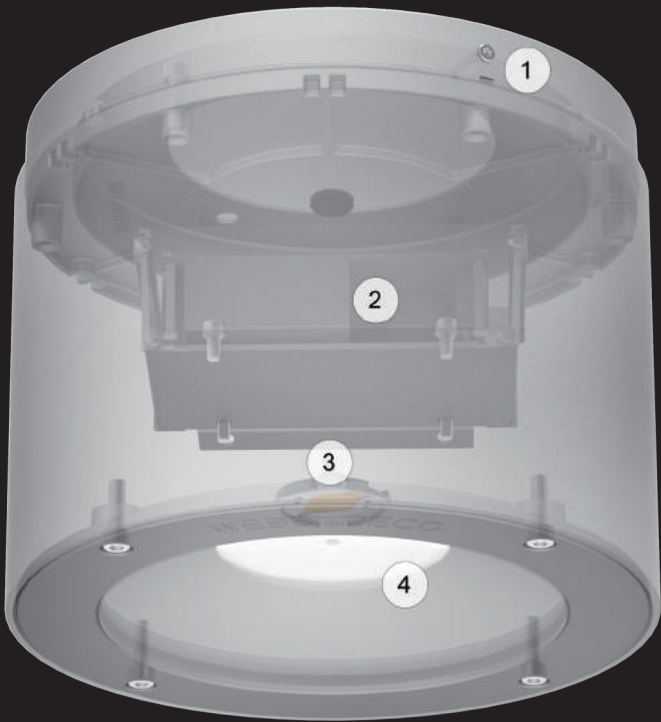


- 1. 隐蔽式安装支架，与天花无缝贴合
- 2. 驱动电源
- 3. COB LDE 光源模组搭配先进光学设计
- 4. 深度防眩装置


- 1.Flush mounted bracket, no gap occurred between ceiling and luminaries
- 2.Integrated LED driver.
- 3.COB lamp module with advanced optical design
- 4.Deep anti-glare louver



不同大小尺寸  
Square and cylinder  
typical design in  
different sizes

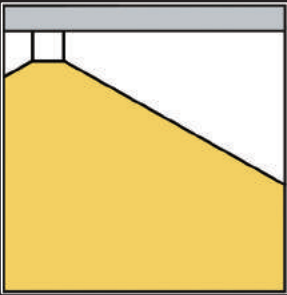

30-40°切光角，减少眩光，提高舒适度  
30~40deg optical cut-off achieve  
maximum visual com

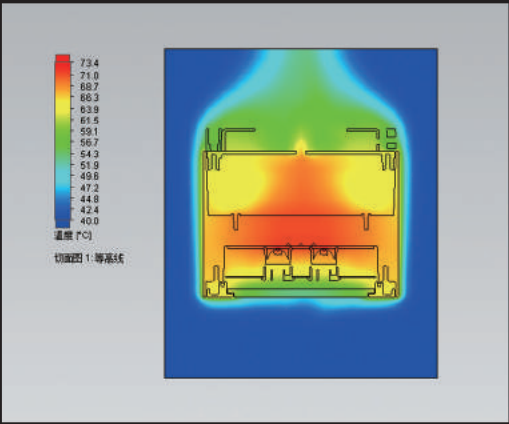

优异的散热性能  
Excellent heat  
dissipation



Optimised system power

优异的散热设计及气体流动设计，  
使整体功率最大化提升  
Excellent heat dissipation plus  
Fluid-dynamic design optimized  
the system power



配有隐蔽式安装支架  
With flush mounted  
bracket



10°

25°

40°

60°

多种不同的配光角度选择  
Different options of beam  
angle light distribution



60.8503



Standard color



Optional color

- 材质：

ADC12 铝合金灯体；  
304# 不锈钢紧固螺丝；  
硅胶密封垫；  
铜镀镍防水接头；  
3mm 钢化安全玻璃
- 表面处理：

双层耐候耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～+50℃；  
可调角度范围：不可调；  
灯具禁止安装在低洼处
- 线材：

单色常亮：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；  
DMX512 控制：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；  
2 条 0.4 米四芯信号线，线径 6.0mm
- 包装：

灯具净重：2.2kg  
内盒尺寸：185x185x165mm  
外箱尺寸：570x380x350mm  
包装容量：12 灯 / 箱  
包装毛重：27.4kg

- Material:

ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:

Ambient temperature: -30℃～+50℃  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 2/3 cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:


Net weight: 2.2kg  
Outer carton: 570x380x350mm(12pcs/ctn)











Optimised system power




60.8503



|                                                                                                              |                                                                                    |                                                                                     |                                           |                                              |                                               |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|----------------------------------------------|-----------------------------------------------|
| <br>LED 24W<br>4000k<br>10° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>7480<br>1209<br>280<br>70   | <b>maxlux</b><br>11000<br>1750<br>415<br>105  |
| <br>LED 24W<br>4000k<br>25° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>1180<br>242<br>54<br>14     | <b>maxlux</b><br>2210<br>347<br>83<br>22      |
| <br>LED 24W<br>4000k<br>40° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>616<br>88.6<br>24<br>10.6   | <b>maxlux</b><br>849<br>144<br>34<br>14.6     |
| <br>LED 24W<br>4000k<br>60° |  |  | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>241.8<br>32.7<br>7.8<br>2.3 | <b>maxlux</b><br>322.9<br>46.8<br>10.9<br>5.4 |

| Model No.        | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle      |
|------------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|-----------------|
| 60.8503.A12V24   | 12X2W           | 2200K-5700K | Ra>80 | 3120lm                            | 24W          | 2300lm                         | 95.8lm/W           | ON/OFF       | 10°/25°/40°/60° |
| 60.8503.A12V220  | 12X2W           | 2200K-5700K | Ra>80 | 3120lm                            | 27W          | 2300lm                         | 85lm/W             | ON/OFF       | 10°/25°/40°/60° |
| 60.8503.A12FV220 | 12X2W           | RGB         |       | 1008lm                            | 27W          | 770lm                          | 28.5lm/W           | DMX512       | 10°/25°/40°/60° |
| 60.8503.B1V220   | 1X21W           | 2700K-5700K | Ra>80 | 2850lm                            | 24W          | 1990lm                         | 83lm/W             | ON/OFF       | 15°/25°/40°/60° |

Installation:

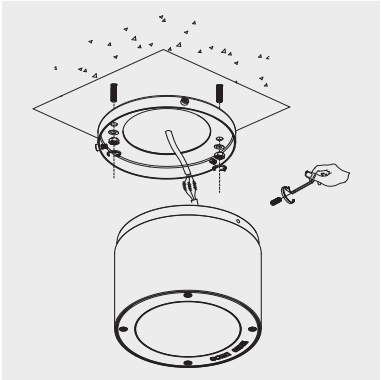





60.8504



Standard color



Optional color

- 材质：

ADC12 铝合金灯体；  
304# 不锈钢紧固螺丝；  
硅胶密封垫；  
铜镀镍防水接头；  
3mm 钢化安全玻璃
- 表面处理：

双层耐候耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～+50℃；  
可调角度范围：不可调；  
灯具禁止安装在低洼处
- 线材：

单色常亮：1 条 0.4 米三芯电源线，线径 7.0mm；  
DMX512 控制：1 条 0.4 米三芯电源线，线径 7.0mm；  
2 条 0.4 米四芯信号线，线径 6.0mm
- 包装：

灯具净重：4.8kg  
内盒尺寸：235x235x200mm  
外箱尺寸：485x480x220mm  
包装容量：4 灯 / 箱  
包装毛重：21kg

- Material:

ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:

Ambient temperature: -30℃～+50℃  
Single color: 1x0.4m length 3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 3cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:


Net weight: 4.8kg  
Outer carton: 485x480x220mm(4pcs/ctn)











Optimised system power




60.8504

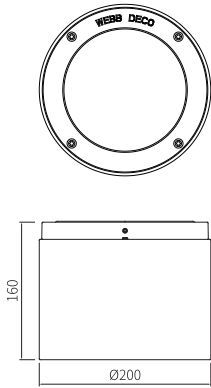

|                                                                                                              |                                                                                    |                                                                                     |                                           |                                              |                                               |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|----------------------------------------------|-----------------------------------------------|
| <br>LED 40W<br>4000k<br>10° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>11250<br>1809<br>420<br>115 | <b>maxlux</b><br>17000<br>2400<br>635<br>165  |
| <br>LED 40W<br>4000k<br>25° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>1180<br>242<br>54<br>14     | <b>maxlux</b><br>2210<br>347<br>83<br>22      |
| <br>LED 40W<br>4000k<br>40° |   |   | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>616<br>88.6<br>24<br>10.6   | <b>maxlux</b><br>849<br>144<br>34<br>14.6     |
| <br>LED 40W<br>4000k<br>60° |  |  | <b>H(m)</b><br>2.0<br>5.0<br>10.0<br>20.0 | <b>medlux</b><br>241.8<br>32.7<br>7.8<br>2.3 | <b>maxlux</b><br>322.9<br>46.8<br>10.9<br>5.4 |

| Model No.        | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle      |
|------------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|-----------------|
| 60.8504.A18V220  | 18X2W           | 2200K-5700K | Ra>80 | 4680lm                            | 40W          | 3650lm                         | 91lm/W             | ON/OFF       | 10°/25°/40°/60° |
| 60.8504.A18FV220 | 18X2W           | RGB         |       | 1515lm                            | 40W          | 1160lm                         | 29lm/W             | DMX512       | 10°/25°/40°/60° |
| 60.8504.B1V220   | 1X36W           | 2700K-5700K | Ra>80 | 5040lm                            | 40W          | 3500lm                         | 87lm/W             | ON/OFF       | 15°/25°/40°/60° |


Installation:

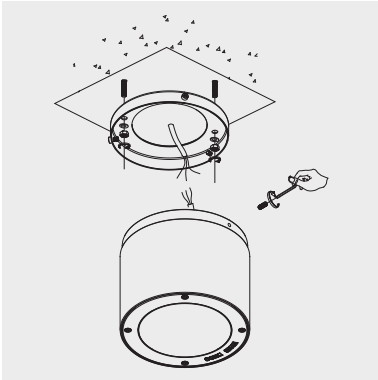





60.0506

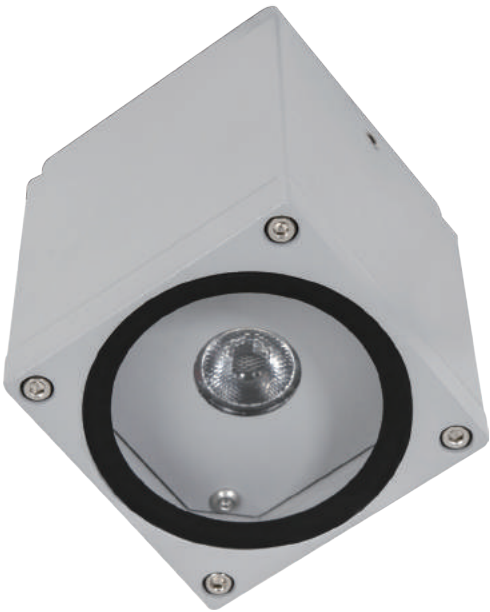

Standard color



Optional color

- 材质:

ADC12 铝合金灯体;  
304# 不锈钢紧固螺丝;  
硅胶密封垫;  
铜镀镍防水接头;  
3mm 钢化安全玻璃
- 表面处理:

双层耐侯耐腐蚀静电粉末喷涂
- 安装:

适应环境温度: -30℃~ +50℃;  
可调角度范围: 不可调;  
灯具禁止安装在低洼处
- 线材:

单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm
- 包装:

灯具净重: 0.6kg  
内盒尺寸: 100x100x145mm  
内盒尺寸: 415x315x310mm  
包装容量: 24 灯 / 箱  
包装毛重: 16kg

- Material:


ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30℃~ +50℃  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable  
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 0.6kg  
Outer carton: 415x315x310mm(24pcs/ctn)

60.0506


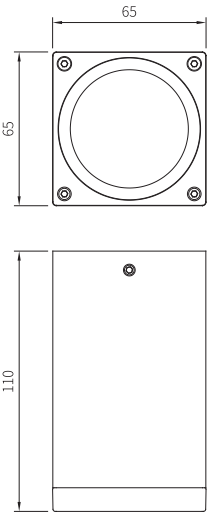


LED 3W  
4000k  
3°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 1693   | 3393   |
| 5.0  | 288    | 545    |
| 10.0 | 67     | 133.7  |
| 20.0 | 19     | 38     |

LED 3W  
4000k  
10°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 488    | 730    |
| 5.0  | 75     | 115    |
| 10.0 | 18     | 26     |
| 20.0 | 4.5    | 7      |

LED 3W  
4000k  
25°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 189.8  | 282.9  |
| 5.0  | 31.1   | 44.9   |
| 10.0 | 6.9    | 10.4   |
| 20.0 | 1.8    | 2.8    |

LED 3W  
4000k  
40°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 79.4   | 106.9  |
| 5.0  | 11     | 17.3   |
| 10.0 | 3.1    | 4.5    |
| 20.0 | 1.4    | 1.8    |


LED 3W  
4000k  
60°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 31     | 41.4   |
| 5.0  | 4.2    | 6      |
| 10.0 | 1      | 1.4    |
| 20.0 | 0.3    | 0.7    |

| Model No.      | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle         |
|----------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|--------------------|
| 60.0506.A1V12  | 1X2.5W          | 2200K-5700K | Ra>80 | 320lm                             | 2.5W         | 250lm                          | 100lm/W            | ON/OFF       | 3°/10°/25°/40°/60° |
| 60.0506.A1V220 | 1X2.5W          | 2200K-5700K | Ra>80 | 320lm                             | 3.5W         | 250lm                          | 73lm/W             | ON/OFF       | 3°/10°/25°/40°/60° |

Installation:

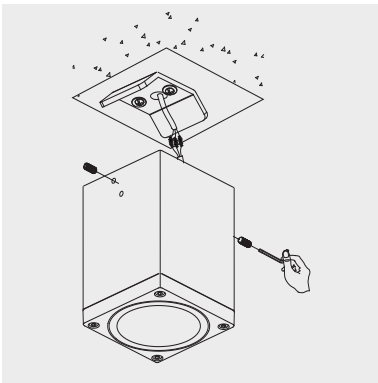



60.0507



- 材质：

ADC12 铝合金灯体；  
304# 不锈钢紧固螺丝；  
硅胶密封垫；  
铜镀镍防水接头；  
3mm 钢化安全玻璃
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～ +50℃；  
可调角度范围：不可调；  
灯具禁止安装在低洼处
- 线材：

单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；  
DMX512 控制： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；  
2 条 0.4 米四芯信号线，线径 6.0mm
- 包装：

灯具净重： 1.5kg  
内盒尺寸： 155x155x155mm  
外箱尺寸： 480x325x330mm  
包装容量： 12 灯 / 箱  
包装毛重： 19kg



Standard color



Optional color

- Material:


ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30℃～ +50℃ ;  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 2/3 cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 1.5kg  
Outer carton: 480x325x330mm(12pcs/ctn)

60.0507


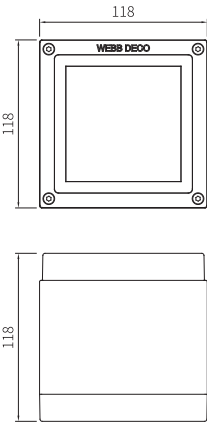


LED 9W  
4000k  
15°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 1314.7 | 1914.7 |
| 5.0  | 210.1  | 306.4  |
| 10.0 | 52.6   | 76.3   |
| 20.0 | 13     | 19.3   |

LED 9W  
4000k  
25°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 569.4  | 848.7  |
| 5.0  | 93.3   | 134.7  |
| 10.0 | 20.7   | 31.2   |
| 20.0 | 5.4    | 8.4    |

LED 9W  
4000k  
40°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 238.2  | 320.7  |
| 5.0  | 33     | 51.9   |
| 10.0 | 9.3    | 13.5   |
| 20.0 | 4.2    | 5.4    |


LED 9W  
4000k  
60°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 93     | 124.2  |
| 5.0  | 12.6   | 18     |
| 10.0 | 3      | 4.2    |
| 20.0 | 0.9    | 2.1    |

| Model No.       | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle          |
|-----------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|---------------------|
| 60.0507.D9V24   | 9X1W            | 2200K-5700K | Ra>80 | 1125lm                            | 9W           | 844lm                          | 94lm/W             | ON/OFF       | 15°/25°/40°/60°/90° |
| 60.0507.D9V220  | 9X1W            | 2200K-5700K | Ra>80 | 1125lm                            | 11W          | 843lm                          | 76lm/W             | ON/OFF       | 15°/25°/40°/60°/90° |
| 60.0507.A9FV12  | 9X2W            | RGB         |       | 756lm                             | 18W          | 567lm                          | 31.5lm/W           | DMX512       | 15°/25°/40°/60°/90° |
| 60.0507.A9FV220 | 9X2W            | RGB         |       | 756lm                             | 21W          | 567lm                          | 27lm/W             | DMX512       | 15°/25°/40°/60°/90° |


Installation：

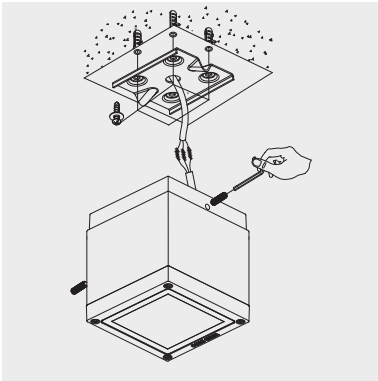





60.0508

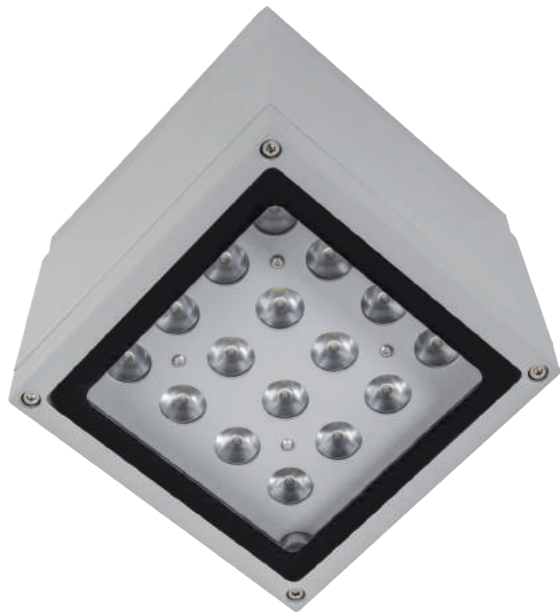

- 材质:

ADC12 铝合金灯体;  
304# 不锈钢紧固螺丝;  
硅胶密封垫;  
铜镀镍防水接头;  
3mm 钢化安全玻璃
- 表面处理:

双层耐侯耐腐蚀静电粉末喷涂
- 安装:

适应环境温度: -30°C~ +50°C;  
可调角度范围: 不可调;  
灯具禁止安装在低洼处
- 线材:

单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
DMX512 控制: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
2 条 0.4 米四芯信号线, 线径 6.0mm
- 包装:

灯具净重: 3.02kg  
内盒尺寸: 185x185x190mm  
外箱尺寸: 380x380x390mm  
包装容量: 8 灯 / 箱  
包装毛重: 25kg



Standard color



Optional color

- Material:



ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30°C~ +50°C  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 2/3 cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 3.02kg  
Outer carton: 380x380x390mm(8pcs/ctn)

60.0508





LED 24W  
4000k  
10°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 4750   | 7260   |
| 5.0  | 858    | 1189   |
| 10.0 | 192    | 287    |
| 20.0 | 47.5   | 72.5   |

LED 24W  
4000k  
25°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 1518.4 | 2263.2 |
| 5.0  | 248.8  | 359.2  |
| 10.0 | 55.2   | 83.2   |
| 20.0 | 14.4   | 22.4   |

LED 24W  
4000k  
40°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 635.2  | 855.2  |
| 5.0  | 88     | 138.4  |
| 10.0 | 24.8   | 36     |
| 20.0 | 11.2   | 14.4   |


LED 24W  
4000k  
60°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 248    | 331.2  |
| 5.0  | 33.6   | 48     |
| 10.0 | 8      | 11.2   |
| 20.0 | 2.4    | 5.6    |

| Model No.        | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle      |
|------------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|-----------------|
| 60.0508.D24V24   | 24X1W           | 2200K-5700K | Ra>80 | 3000lm                            | 24W          | 2250lm                         | 93.7lm/W           | ON/OFF       | 25°/40°/60°     |
| 60.0508.D24V220  | 24X0.1W         | 2200K-5700K | Ra>80 | 3000lm                            | 27W          | 2250lm                         | 83lm/W             | ON/OFF       | 25°/40°/60°     |
| 60.0508.A16SV24  | 16X1.5W         | RGBW        |       | 1380lm                            | 24W          | 1070lm                         | 44.5lm/W           | DMX512       | 10°/25°/40°/60° |
| 60.0508.A16SV220 | 16X1.5W         | RGBW        |       | 1380lm                            | 27W          | 1070lm                         | 39.5lm/W           | DMX512       | 10°/25°/40°/60° |

Installation:

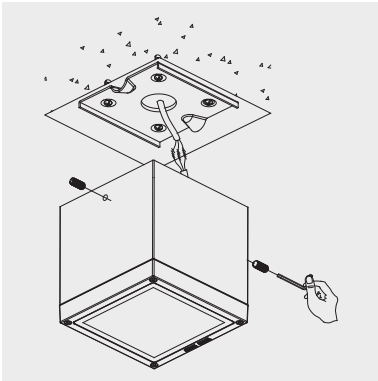



60.0509



- 材质:

ADC12 铝合金灯体、压盖;  
304# 不锈钢紧固螺丝;  
硅胶密封垫;  
铜镀镍防水接头;  
3mm 钢化安全玻璃
- 表面处理:

双层耐侯耐腐蚀静电粉末喷涂
- 安装:

适应环境温度: -30°C~ +50°C;  
可调角度范围: 不可调;  
灯具禁止安装在低洼处
- 线材:

单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
DMX512 控制: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
2 条 0.4 米四芯信号线, 线径 6.0mm
- 包装:

灯具净重: 4.7kg  
内盒尺寸: 238x238x240mm  
外箱尺寸: 485x245x495mm  
包装容量: 4 灯 / 箱  
包装毛重: 20.2kg



Standard color



Optional color

- Material:


ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30°C~ +50°C ;  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 2/3 cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 4.7kg  
Outer carton: 485x245x495mm(4pcs/ctn)

60.0509


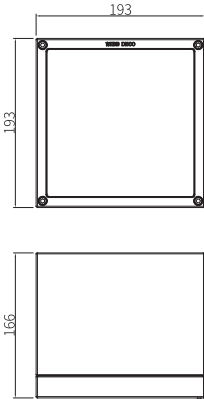


LED 36W  
4000k  
10°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 7200   | 11000  |
| 5.0  | 1296   | 1800   |
| 10.0 | 302    | 436    |
| 20.0 | 71.8   | 109.5  |

LED 36W  
4000k  
25°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 2277.6 | 3394.8 |
| 5.0  | 373.2  | 538.8  |
| 10.0 | 82.8   | 124.8  |
| 20.0 | 21.6   | 33.6   |

LED 36W  
4000k  
40°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 952.8  | 1282.8 |
| 5.0  | 132    | 207.6  |
| 10.0 | 37.2   | 54     |
| 20.0 | 16.8   | 21.6   |


LED 36W  
4000k  
60°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 372    | 496.8  |
| 5.0  | 50.4   | 72     |
| 10.0 | 12     | 16.8   |
| 20.0 | 3.6    | 8.4    |

| Model No.        | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle      |
|------------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|-----------------|
| 60.0509.D36V36   | 36X1W           | 2200K-5700K | Ra>80 | 4500lm                            | 36W          | 3375lm                         | 93.7lm/W           | ON/OFF       | 25°/40°/60°     |
| 60.0509.D36V220  | 36X1W           | 2200K-5700K | Ra>80 | 3900lm                            | 40W          | 3375lm                         | 85lm/W             | ON/OFF       | 25°/40°/60°     |
| 60.0509.A24FV36  | 24X1.5W         | RGB         |       | 1512lm                            | 36W          | 1134lm                         | 31.5lm/W           | DMX512       | 10°/25°/40°/60° |
| 60.0509.A24FV220 | 24X1.5W         | RGB         |       | 1310lm                            | 40W          | 1134lm                         | 28.5lm/W           | DMX512       | 10°/25°/40°/60° |
| 60.0509.A24SV36  | 24X1.5W         | RGBW        |       | 2055lm                            | 36W          | 1600lm                         | 44.5lm/W           | DMX512       | 10°/25°/40°/60° |
| 60.0509.A24SV220 | 24X1.5W         | RGBW        |       | 2055lm                            | 40W          | 1600lm                         | 40lm/W             | DMX512       | 10°/25°/40°/60° |


Installation:

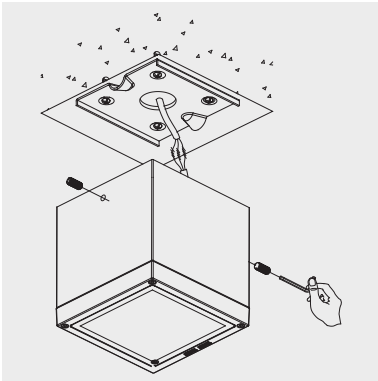





60.0515



- 材质:

ADC12 铝合金灯体;  
304# 不锈钢紧固螺丝;  
硅胶密封垫;  
铜镀镍防水接头;  
3mm 钢化安全玻璃
- 表面处理:

双层耐侯耐腐蚀静电粉末喷涂
- 安装:

适应环境温度: -30°C~ +50°C;  
适应环境湿度: 100%;  
可调角度范围: 不可调;  
灯具禁止安装在低洼处
- 线材:

单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
DMX512 控制: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;  
2 条 0.4 米四芯信号线, 线径 6.0mm
- 包装:

灯具净重: 1.35kg  
内盒尺寸: 132x132x155mm  
外箱尺寸: 410x410x320mm  
包装容量: 18 灯 / 箱  
包装毛重: 25.8kg



Standard color



Optional color

- Material:


ADC12 corrosion-resistant die-cast aluminum housing;  
304 stainless steel external fasten screws;  
Anti-aging waterproof silicone gasket;  
3mm clear safety glass
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30°C~ +50°C  
Single color: 1x0.4m length 2/3cores Ø7.0mm power supply cable;  
DMX512 controllable: 1x0.4m length 2/3 cores Ø7.0mm power supply cable;  
2x0.4m length 4 cores Ø6.0mm signal supply cable;  
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 1.35kg  
Outer carton: 410x410x320mm(18pcs/ctn)

60.0515


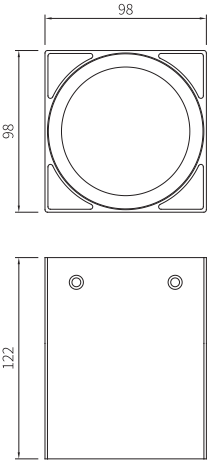


LED 8W  
4000k  
12°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 1874.6 | 2753.9 |
| 5.0  | 304.2  | 448.5  |
| 10.0 | 71.7   | 107.6  |
| 20.0 | 17.9   | 27     |

LED 8W  
4000k  
25°





| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 493.4  | 735.5  |
| 5.0  | 80.6   | 116.7  |
| 10.0 | 17.9   | 27     |
| 20.0 | 4.6    | 7.2    |

LED 8W  
4000k  
40°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 206.4  | 284.9  |
| 5.0  | 28.6   | 44.9   |
| 10.0 | 8      | 11.7   |
| 20.0 | 3.6    | 4.6    |

LED 8W  
4000k  
60°



| H(m) | medlux | maxlux |
|------|--------|--------|
| 2.0  | 80.6   | 107.6  |
| 5.0  | 10.9   | 15.6   |
| 10.0 | 2.6    | 3.6    |
| 20.0 | 0.7    | 1.8    |

| Model No.      | LED Qty X Power | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficacy | Control Mode | Beam Angle      |
|----------------|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|--------------------|--------------|-----------------|
| 60.0515.A4V24  | 4X2W            | 2200K-5700K | Ra>80 | 1040lm                            | 8W           | 780lm                          | 97.5lm/W           | ON/OFF       | 12°/25°/40°/60° |
| 60.0515.A4V220 | 4X2W            | 2200K-5700K | Ra>80 | 975lm                             | 10W          | 780lm                          | 78lm/W             | ON/OFF       | 12°/25°/40°/60° |

Installation:

