




70.6051

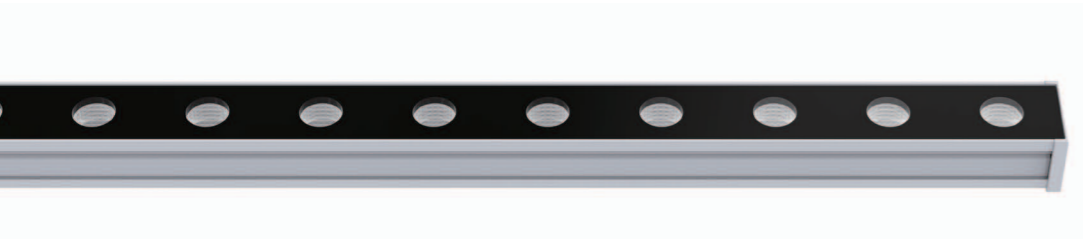

材质: 6063 T5 铝型材灯体;
 锌合金端盖;
 304# 不锈钢支架与紧固螺丝;
 铜镀镍防水接头;
 3mm 钢化安全玻璃

表面处理: 氧化铝白色或双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +45°C;
 可调角度范围: 水平不可调, 垂直方向 ±70°;
 灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.1 米二芯公母插, 线径 7.0mm;
 DMX512 控制: 2 条 0.1 米 5 芯公母插, 线径 7.6mm;


包装: 灯具净重: 1.4kg
 包装尺寸: 1060x295x260mm
 包装容量: 12 灯 / 箱
 包装毛重: 18.5kg

Material: Corrosion-resistant aluminum housing & Zinc alloy end cap;
 3mm clear safety glass;
 Anti-aging waterproof silicone gasket;
 304 stainless steel mounting brackets & external fasten screws.

Finishing: Double layers of UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +45°C ;
 Tilttable: +/-70° ;
 Single Color: 2x0.1m length 2-cores Ø7.5mm power supply cable;
 DMX512 compatible: 2x0.1m length 5-cores Ø7.6mm data cables with waterproof connector.


Packaging: Nickel plated brass waterproof cable gland
 Net Weight: 1.4kg
 1060x295x286mm (12pcs/carton)



Continuous Installation



With breathable waterproof air vent




IP68 Waterproof male-female connector



Anti-glare shield




70.6051

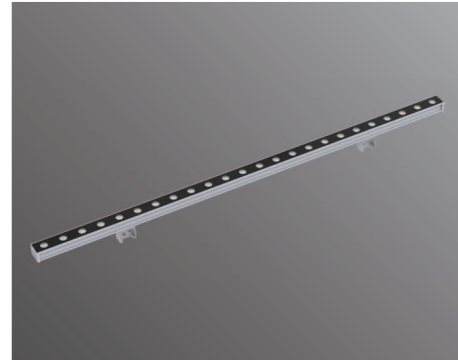

LED 36W 4000k Beam Angle	Beam Diagram	Beam Diagram	H(m)	medlux	maxlux
20°		13128cd	2.0	2268	3282
			5.0	362.8	525.1
			10.0	90.7	131.3
			20.0	22.7	32.82
30°		7677cd	2.0	1301.4	1920
			5.0	203.4	307
			10.0	50.9	76.8
			20.0	12.7	19.2
45°		3765cd	2.0	590	941.2
			5.0	94.4	150.6
			10.0	23.6	37.7
			20.0	5.9	9.4
60°		2527cd	2.0	363.7	632
			5.0	58.2	101.1
			10.0	14.5	25.3
			20.0	3.6	6.3
20x30°		10131cd	2.0	1956	2532
			5.0	212.9	405.3
			10.0	78.2	101.3
			20.0	19.56	25.3
20x55°		5595cd	2.0	1075	1398.6
			5.0	172	223.8
			10.0	43	55.9
			20.0	10.7	14

Model No.	LED Color Temp	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficiency	Control Mode	Beam Angle
70.6051.D36V24L1200	2200K-5700K	Ra>80	5940lm	36W	3708lm	103lm/W	ON/OFF	Wall wash: 20x30°/20x55° Spot: 16°/25°/30°/45°/60°
70.6051.D36CV24L1200	2200K-5700K	Ra>80	5940lm	36W	3708lm	103lm/W	DMX512 , 1/4/8pixels	Wall wash: 20x30°/20x55° Spot: 16°/25°/30°/45°/60°
70.6051.E24HV24L1200	1800K~6000K	Ra>80	4600lm	36W	2952lm	82lm/W	DMX512 , 1/4/8pixels	30°/20x40°/15x55°
70.6051.E24SV24L1200	RGBW		2300lm	36W	1296lm	36lm/W	DMX512 , 1/4/8pixels	30°/20x40°/15x55°

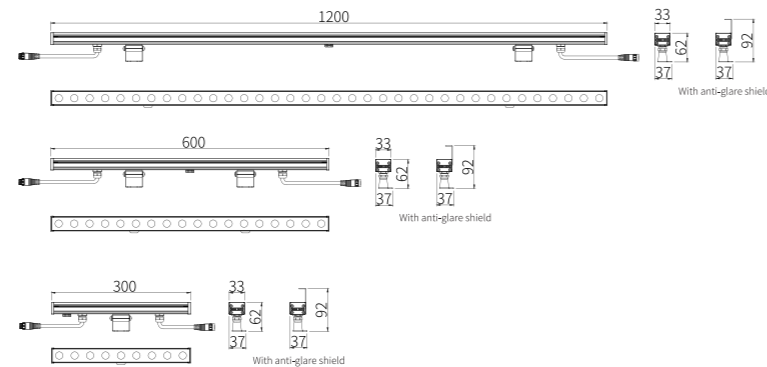

Installation:

