




70.6052



材质: 6063 T5 铝型材灯体;
 锌合金端盖;
 304# 不锈钢支架与紧固螺丝;
 铜镀镍防水接头;
 3mm 钢化安全玻璃

表面处理: 氧化铝白色或双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +45°C;
 可调角度范围: 水平不可调, 垂直方向 ±70°;
 灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.1 米二芯公母插, 线径 7.0mm;
 DMX512 控制: 2 条 0.1 米 5 芯公母插, 线径 7.6mm;



包装: 灯具净重: 1.4kg
 包装尺寸: 1060x295x260mm
 包装容量: 12 灯 / 箱
 包装毛重: 18.5kg

Material: Corrosion-resistant aluminum housing & Zinc alloy end cap;
 3mm clear safety glass;
 Anti-aging waterproof silicone gasket;
 304 stainless steel mounting brackets & external fasten screws.

Finishing: Double layers of UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +45°C ;
 Tilttable: +/-70° ;
 Single Color: 2x0.1m length 2-cores Ø7.5mm power supply cable;
 DMX512 compatible: 2x0.1m length 5-cores Ø7.6mm data cables with waterproof connector.
 Nickel plated brass waterproof cable gland;
 Installation in Low Lying area is prohibited;


Packaging: Net Weight: 1.4kg
 1060x295x260mm (12pcs/carton)

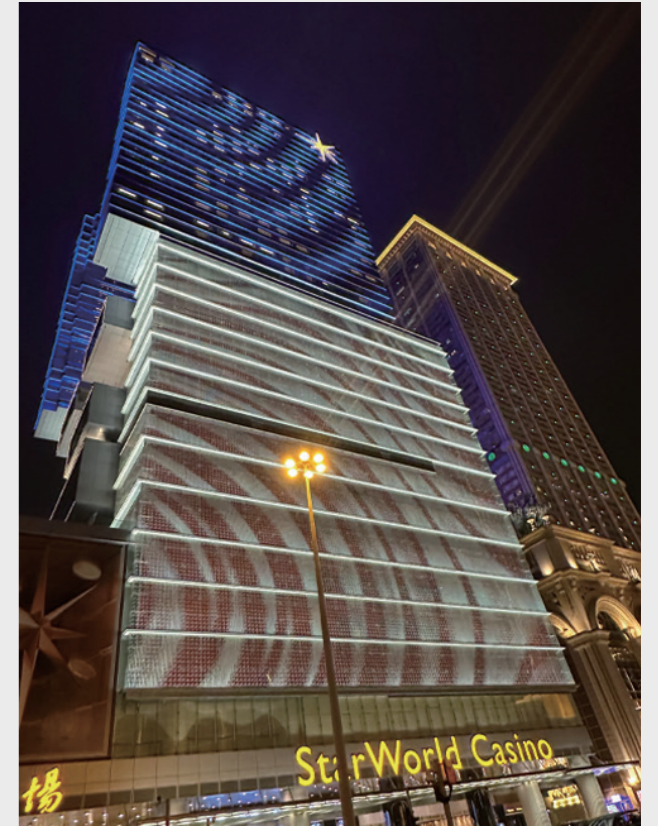

Continuous Installation



With breathable waterproof air vent




IP68 Waterproof male-female connector



Anti-glare shield




70.6052

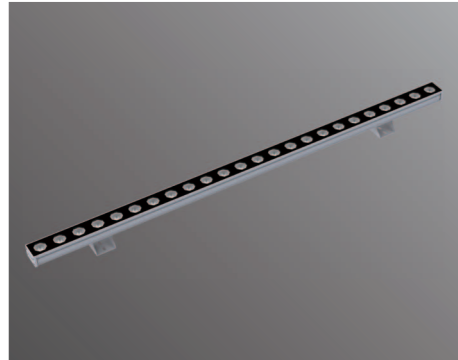

Beam Angle	LED 60W 4000k	Beam Diagram	H(m)	medlux	maxlux
8°		80146cd	2.0	14337	20037
			5.0	2293	3206
			10.0	573.3	801.5
			20.0	144	200.2
14°		66590cd	2.0	11767.5	16645
			5.0	1882.6	2663.2
			10.0	470.7	665.7
			20.0	117.6	166.3
20°		42355cd	2.0	7280.2	10589.1
			5.0	1164.4	1694.5
			10.0	291.15	423.4
			20.0	72.7	105.8
30°		17104cd	2.0	2948	4276
			5.0	471.6	684.1
			10.0	117.9	171
			20.0	29.4	42.7
40°		12370cd	2.0	2076.7	3092.5
			5.0	332.2	494.7
			10.0	83.1	123.7
			20.0	20.7	30.9
60°		5782cd	2.0	899.4	1437.3
			5.0	143.8	229.8
			10.0	36	57.5
			20.0	9	14.4

Model No.	LED Color Temp	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficiency	Control Mode	Beam Angle
70.6052.A24V36L1200	2200K-5700K	Ra>80	8400lm	60W	5580lm	93lm/W	ON/OFF	Wall wash: 8x10°/10x30°/10x55° Spot: 5°/8°/14°/20°/30°/40°/60°
70.6052.A24CV36L1200	2200K-5700K	Ra>80	8400lm	60W	5580lm	93lm/W	DMX512 , 1/4/8pixels	Wall wash: 8x10°/10x30°/10x55° Spot: 5°/8°/14°/20°/30°/40°/60°
70.6052.E24HV36L1200	1800K~6000K	Ra>80	7200lm	60W	4440lm	74lm/W	DMX512 , 1/4/8pixels	Wall wash: 10x40°/20x40°/10°/16° Spot: 10°/16°/25°/40°/60°
70.6052.E24SV36L1200	RGBW		4100lm	60W	2220lm	37lm/W	DMX512 , 1/4/8pixels	Wall wash: 10x40°/20x40°/10°/16° Spot: 10°/16°/25°/40°/60°
70.6052.D36V36L1200	2200K-5700K	Ra>80	5940lm	36W	3780lm	105lm/W	ON/OFF	Wall wash: 10x30°/10x55° Spot: 10°/16°/25°/40°/60°
70.6052.D36CV36L1200	2200K-5700K	Ra>80	5940lm	36W	3780lm	105lm/W	DMX512 , 1/4/8pixels	Wall wash: 10x30°/10x55° Spot: 10°/16°/25°/40°/60°

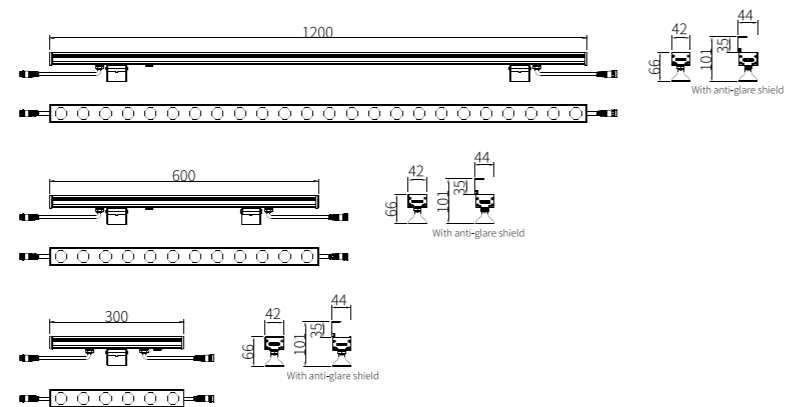

Installation:

